



Bobcat

One Tough Animal

ZERO-TURN MOWERS

RESIDENTIAL MOWERS – ZT2000, ZT3000, ZT3500

🌐 Europe



STAY ON TOP OF YOUR GAME WITH BOBCAT RIDE-ON MOWERS

Tackle terrain with total peace of mind thanks to the robust, durable construction and stylish new design of Bobcat's ride-on mowers. Enjoy seamless, safe operation and unmatched user convenience with an enhanced operator experience, an anti-vibe floormat, and a premium seat built for even more comfort.

At Bobcat, we understand the importance of having the right products and services. For more information, contact your local dealer or visit: www.bobcat.com.



BE IN THE DRIVER’S SEAT

► RIDE IN COMFORT. CUT WITH CONFIDENCE

Take a seat and enjoy the ride with our refreshed series of ride-on mowers — a well-tuned package of excellent cutting quality, a low center of gravity, and exceptional comfort. Perfect for mowing large lawns or tackling general applications, this updated lineup brings you an improved operator experience alongside enhanced safety and user convenience.





SPECIFICATIONS

SPECIFICATIONS		ZT2000		ZT3000			ZT3500		
CUTTING DECK WIDTH	Unit	122 cm	132 cm	122 cm	132 cm	155 cm	122 cm	132 cm	155 cm
ENGINE									
Model		FR651V		FT651V	FT730V				
Engine manufacturer		Kawasaki							
Engine power	kW / HP	16.0 / 21.5		14.9 / 20	17.9 / 24				
Displacement	cm³	726							
Fuel capacity	l	14					29.5		
Air filter		Single stage		Dual element					
ELECTRICAL									
Charging system	A	15							
Clutch	Nm	142		169					
DECK									
Mower deck		TufDeck Cutting System					TufDeck Pro Cutting System		
Width	cm / inch	122 / 48	132 / 52	122 / 48	132 / 52	155 / 61	122 / 48	132 / 52	155 / 61
Adjustable anti-scalp rollers		3				6	3		6
Cutting height	mm	38 – 114							
Blade tip speed @ 3 500 RPM	m/s	74.7	82.8	73.6	81.5	85.4	73.6	81.5	85.4
Discharge chute		Flexible molded polymer							
FRAME									
Front and rear		1.5 × 2.5-inch steel tubing; welded steel-reinforced frame							
Machine length	mm	1 930				2 006	1 930		2 006
Machine weight	kg	350	357	334	342	361	400	407	422
TRANSMISSION									
Type		HG ZT-2800 hydrostatic transaxles		HG ZT-3100 hydrostatic transaxles			HG ZT-3400 hydrostatic transaxles		
Pump displacement	cm³	10					12		
Oil capacity	l	3.8							
Forward speed	km/h	11		12.8			16		
Reverse speed	km/h	4.8		5.6					
WHEELS									
Drive wheel size		20 × 10-10.4		22 × 11-10			23 × 10.5-12		
Front caster wheel size		11 × 6-5		13 × 6.5-6					
Caster arm		Welded to frame							
SEAT									
Description		High-back, spring suspension Seat		High-back, EVC and spring suspension seat			High-back, full mechanical suspension seat		
Fore-aft adjustment		Seat slide lever							



DIMENSIONS

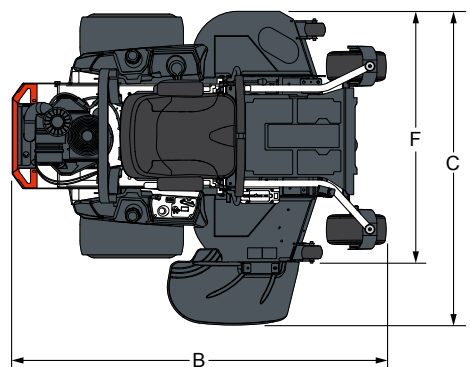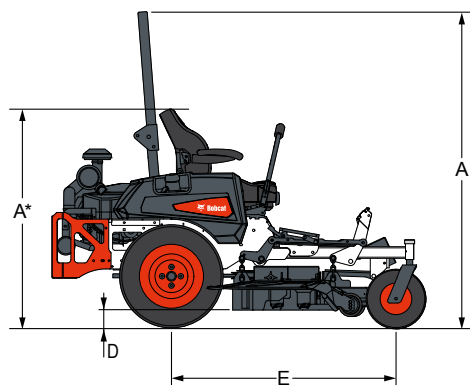

DIMENSIONS

		ZT2000		ZT3000			ZT3500		
CUTTING DECK WIDTH	Unit	122 cm	132 cm	122 cm	132 cm	155 cm	122 cm	132 cm	155 cm
A Height (ROPS up)	mm	–					1 733		
A Height (ROPS down)	mm	–					1 190		
A* Height	mm	1 108		1 173			–		
B Overall length	mm	1 930							
C Overall width (chute up)	mm	1 241	1 381	1 241	1 381	1 600	1 241	1 381	1 600
C Overall width (chute down)	mm	1 591	1 731	1 575	1 731	1 950	1 591	1 731	1 950
D Cutting height	mm	38 – 114							
E Wheelbase	mm	1 220							
F Cutting width	mm	1 220	1 321	1 220	1 321	1 550	1 220	1 321	1 550
Blade length	mm	413	457	413	457	533	413	457	533



DOOSAN

Bobcat is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2026 Bobcat Company. All Rights Reserved.



Bobcat

* Financing options may vary by country and dealer. Always ask your dealer about currently available financing options. Terms and conditions may apply.

Doosan Bobcat EMEA, U Kodetky 1810, 263 12 Dobříš, Czech Republic